



Low thermal inertia



Low water content



Versatility



Easy to stock and install



Maximum working pressure



3 international patents



Mod. 350/700/800



Mod. 500/600



Standard supply

800: from 3 to 10 sections
700: from 3 to 12 sections
600/500/350: from 3 to 14 sections
"Fondital logo" from 6 sections

Colours

PURE WHITE RAL 9010

Maximum working pressure


16 bar

Test pressure

24 bar

All models **Seven N** are guaranteed **10 years** from installation date on manufacturing faults, provided that the installation has been performed in compliance with the current norms and respecting the instructions relating to the installation, the correct use and the correct maintenance as illustrated on this catalogue.

Model	Heat output					
	ΔT 20	ΔT 30	ΔT 40	ΔT 50	ΔT 60	ΔT 70
	W/sect.	W/sect.	W/sect.	W/sect.	W/sect.	W/sect.
350/100	28,3	47,2	67,9	89,9	113,1	137,3
500/100	35,4	59,5	86,0	114,4	144,5	176,1
600/100	40,1	67,8	98,5	131,5	166,5	203,3
700/100	49,0	83,1	120,7	161,3	204,5	249,8
800/100	53,6	91,1	132,7	177,7	225,6	276,0

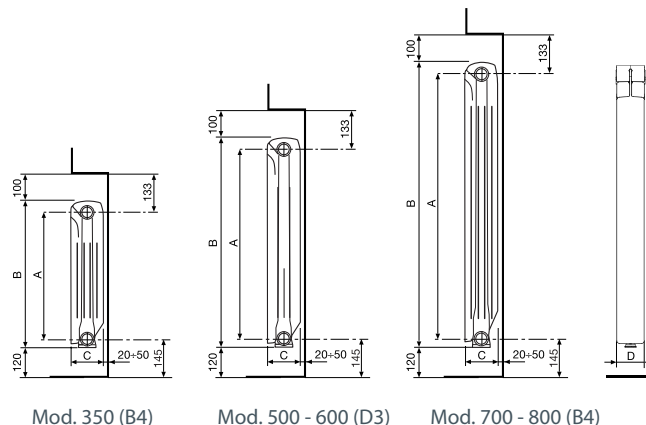

MEASURES EXPRESSED IN MILLIMETRES

Model	Code	Depth	Height	Centre distance	Length	Connection diameters	Water capacity	Exponent	Coefficient
		(C) mm	(B) mm	(A) mm	(D) mm	inches	litres/sect.	n	Km
350/100	V677014	97	407	350	80	G1	0,20	1,2598	0,6506
500/100	V718034	97	557	500	80	G1	0,25	1,2813	0,7613
600/100	V718044	97	657	600	80	G1	0,29	1,2957	0,8270
700/100	V677054	97	758	700	80	G1	0,36	1,2998	0,9986
800/100	V677064	97	858	800	80	G1	0,39	1,3085	1,0635

Maximum working pressure: 1600 kpa (16 bar) Maximum working temperature: 120 °C

Characteristic equation of the model $\Phi = K_m \Delta T^n$

The thermal efficiency values shown comply with the European Standard EN 442-1:2014 and are certified by the MRT Lab of the Milan Polytechnic, notified body N°1695.

Item	Description		Code
	A 80	The radiator fixing kit includes: 2 Rh G 1/2" adapters; 2 Lh G 1/2" adapters, galvanized and painted; 4 sealing gaskets; 1 G 1/2" manual bleed valve with seal; 1 G 1/2" blind plug with seal	550103
	A 81	The radiator fixing kit includes: 2 Rh G 1/2" adapters; 2 Lh G 1/2" adapters, galvanized and painted; 4 sealing gaskets; 1 G 1/2" manual bleed valve with seal; 1 G 1/2" blind plug with seal; 3 brackets	550104
	A 2/1	RH/LH G 1" Nipple	510011
	A 10/1	1" Seals for nipples (without asbestos)	530105
	A 11/1	1" Seals for plugs (without asbestos)	530108
	A 20	Kit with two adjustable coated brackets	550037

