


eBlitz Soft

THERMODYNAMIC FLUID FILLED ELECTRIC RADIATOR




- **Aluminium body:**
 - Quickly reaches the desired temperature
- **Backlight LCD interface incorporated**
- **NTC temperature probe and electronic temperature regulation**
- **In order to optimise consumption, the radiator provides:**
 - Daily and weekly programming with Adaptive Start Control
 - Open window detection function
 - Consumption display
- **Safety:**
 - Keyboard lock
 - Power reserve >2h
- **Fixing system included**

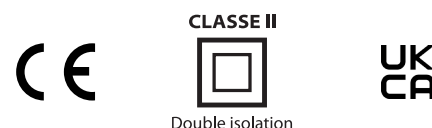

All models **eBlitz Soft** are guaranteed **2 years** for electrical components and **10 years** on the aluminium body from the date of installation against manufacturing defects.



The right side houses the new backlight adjustment and control system with digital display and easy-to-reach buttons regardless of installation type.



Power wire:
- Phase
- Neutral
- Pilot wire

Model	Code for Pilot Wire	Power	Sections	Voltage	Frequency	Length	Height	Depth
		W	num.	V	Hz	mm	mm	mm
500	FBH0M1XD54	500	4	230	50/60	395	577	97
750	FBH0M1XD85	750	5	230	50/60	475	577	97
1000	FBH0M1XDA6	1000	6	230	50/60	555	577	97
1250	FBH0M1XDD8	1250	8	230	50/60	715	577	97
1500	FBH0M1XDF9	1500	9	230	50/60	795	577	97
1800	FBH0M1XDIC	1800	12	230	50/60	1035	577	97

