




**ELECTRIC** RADIATORS



# eBlitz Wi-Fi

THERMODYNAMIC FLUID FILLED  
ELECTRIC RADIATOR

- ▶ **Radiator manageable remotely via Android and Apple smartphones by downloading the Domus One App**
- ▶ **Compatible with Google Home and Alexa**
- ▶ **Aluminium body:**
  - quickly reaches the desired temperature
- ▶ **Backlight LCD interface incorporated**
- ▶ **NTC temperature probe and electronic temperature regulation**
- ▶ **In order to optimise consumption, the radiator provides:**
  - Daily and weekly programming with Adaptive Start Control
  - Open window detection function
  - Consumption display



Model	Code for Pilot Wire	Power	Sections no.	Voltage	Frequency Hz	Length mm	Height mm	Depth mm
		W		V				
<b>750</b>	FBG0M1XR84	750	4	230	50/60	390	583	80
<b>1000</b>	FBG0M1XRA5	1000	5	230	50/60	470	583	80
<b>1250</b>	FBG0M1XRD7	1250	7	230	50/60	630	583	80
<b>1500</b>	FBG0M1XRF9	1500	9	230	50/60	790	583	80
<b>1800</b>	FBG0M1XRIB	1800	11	230	50/60	950	583	80

# DISCOVER THE DOMUS ONE APP!

Download the App from Google Play or the App Store. You will be able to control the operation of your heaters remotely, optimizing consumption and achieving maximum comfort.



## OPEN WINDOW DETECTION

By identifying an open window in the room, the radiator turns off automatically, avoiding energy wastage

## ADAPTIVE START CONTROL


When in Program mode, this smart function will start the radiator at the perfect time based on the current room temperature

## PROGRAM

Easily set a 24/7 heating schedule for your radiators

## TEMPERATURES SET-UP

Customise the Max, Comfort and Eco temperatures

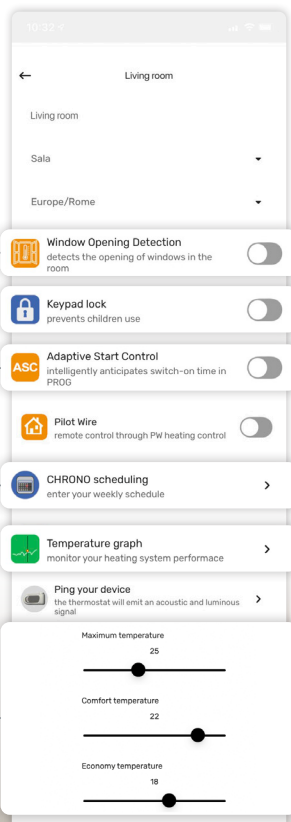

## MODE

- Temporary (Boost)
- Manual (Simple)
- Program

## SECURITY LOCK

Lock and unlock the radiators remotely to prevent tampering and assure children's safety

## TEMPERATURES MONITORING

Monitor the room temperature trend thanks to real-time charts

## GROUPS OF DEVICES

Arrange the radiators into groups and control multiple heaters at the same time





# eBlitz Core

CERAMIC CORE ELECTRIC RADIATOR

► **Aluminium body:**

- quickly reaches the desired temperature

► **Backlight LCD interface incorporated**

► **NTC temperature probe and electronic temperature regulation**


► **In order to optimise consumption, the radiator provides:**

- Daily and weekly programming with Adaptive Start Control
- Open window detection function
- Consumption display

► **Safety:**

- Keyboard lock
- Power reserve >2h

► **Fixing system included**




Model	Code for Pilot Wire	Power	Sections	Voltage	Frequency	Length	Height	Depth
		W	no.	V	Hz	mm	mm	mm
<b>1000</b>	FBZ0M7FDA5	1000	5	230	50/60	473	577	97
<b>1500</b>	FBZ0M7FDF7	1500	7	230	50/60	628	577	97
<b>2000</b>	FBZ0M7FDK9	2000	9	230	50/60	788	577	97

# eBlitz Soft

THERMODYNAMIC FLUID FILLED  
ELECTRIC RADIATOR

- ▶ **Aluminium body:**
  - Quickly reaches the desired temperature
- ▶ **Backlight LCD interface incorporated**
- ▶ **NTC temperature probe and electronic temperature regulation**
- ▶ **In order to optimise consumption, the radiator provides:**
  - Daily and weekly programming with Adaptive Start Control
  - Open window detection function
  - Consumption display
- ▶ **Safety:**
  - Keyboard lock
  - Power reserve >2h
- ▶ **Fixing system included**





Model	Code for Pilot Wire	Power	Sections	Voltage	Frequency	Length	Height	Depth
		W	num.	V	Hz	mm	mm	mm
500	FBH0M1XD54	500	4	230	50/60	395	577	97
750	FBH0M1XD85	750	5	230	50/60	475	577	97
1000	FBH0M1XDA6	1000	6	230	50/60	555	577	97
1250	FBH0M1XDD8	1250	8	230	50/60	715	577	97
1500	FBH0M1XDF9	1500	9	230	50/60	795	577	97
1800	FBH0M1XDIC	1800	12	230	50/60	1035	577	97




# eCool ED

ELECTRIC TOWEL RADIATOR WITH DIGITAL CONTROL

- ▶ **Aluminium body: with low thermal inertia**
- ▶ **LCD backlight interface**
- ▶ **Daily and weekly programming options**
- ▶ **Open window detection function**
- ▶ **Child safety lock**
- ▶ **Fixing system included**
- ▶ **Schuko plug**
- ▶ **Anticorrosion internal treatment  provided**




Model	Code for Schuko Plug	Code for UK Plug	Power	Voltage	Frequency	Length	Height	Depth
			W	V	Hz	mm	mm	mm
<b>300</b>	FCA0M1YD30	FCAI21YD30	300	230	50/60	478	933	45
<b>500</b>	FCA0M1YD50	FCAI21YD50	500	230	50/60	528	1143	45
<b>700</b>	FCA0M1YD70	FCAI21YD70	700	230	50/60	528	1563	45
<b>1000</b>	FCA0M1YDA0	FCAI21YDA0	1000	230	50/60	628	1815	45

Item	Description	Code
	Infrared remote control with wall support (Batteries not included) Features: Comfort, Night, Antifreeze and Stand-by	OZTELINF01

# eGarda2

FLUID FILLED ELECTRIC RADIATORS

- ▶ **Aluminium body:**
  - Quickly reaches the desired temperature
- ▶ **Colours: White RAL 9010 and Anthracite grey**
- ▶ **Interface with color graphic display**
- ▶ **NTC temperature probe and electronic temperature regulation**
- ▶ **In order to optimise consumption, the radiator provides:**
  - Daily and weekly programming options
  - Open window detection function
  - Consumption display
- ▶ **Safety:**
  - Keyboard lock
- ▶ **Fixing system included**




Model	Code for Pilot Wire	Power	Sections	Voltage	Frequency	Length	Height	Depth	Colour
		W	num.	V	Hz	mm	mm	mm	
<b>1500 W</b>	FGD0M1ERF4	1500	4	230	50/60	340	1887	95	White
<b>2000 W</b>	FGD0M1ERK6	2000	5	230	50/60	500	1887	95	White
<b>N 1500 W</b>	FGE0M1ERF4	1500	6	230	50/60	340	1887	95	Anthracite
<b>N 2000 W</b>	FGE0M1ERK6	2000	8	230	50/60	500	1887	95	Anthracite



# Resia

THERMODYNAMIC FLUID FILLED  
ELECTRIC RADIATOR

- ▶ **Best quality / price ratio**
- ▶ **Aluminium alloy body:**
  - Quickly reaches the desired temperature
- ▶ **Light and easy to install**
- ▶ **Modern design and electronics with weekly programming**
- ▶ **Energy saving:**
  - Open window detection function
  - Automatic Start Control (ASC)
- ▶ **Fixing system included**




Model	Code for Pilot Wire	Power	Sections	Voltage	Frequency	Length	Height	Depth
		W	no.	V	Hz	mm	mm	mm
<b>500 W</b>	FRA0M1ED53	500	3	230	50/60	316	577	83
<b>700 W</b>	FRA0M1ED74	700	4	230	50/60	396	577	83
<b>1000 W</b>	FRA0M1EDA5	1000	5	230	50/60	476	577	83
<b>1500 W</b>	FRA0M1EDF8	1500	8	230	50/60	716	577	83
<b>1800 W</b>	FRA0M1EDIA	1800	10	230	50/60	876	577	83

# Dalisa

DUAL HEATING SYSTEM ELECTRIC RADIATOR

- ▶ **Dual heating system::**
  - Dry cast-iron heating element + heated front panel
- ▶ **Quickly reaches the desired temperature**
- ▶ **Colours:** White RAL 9010 and Anthracite grey
- ▶ **Interface with colour graphic display.**
- ▶ **NTC temperature probe and electronic temperature regulation**
- ▶ **In order to optimise consumption, the radiator provides:**
  - Daily and weekly programming options
  - Open window detection function
  - Presence detection function
  - Consumption display
- ▶ **Safety:**
  - Keypad lock




Model	Code for Pilot Wire	Power	Voltage	Frequency	Length	Height	Depth	Net weight	Colour
		W	V	Hz	mm	mm	mm	kg	
<b>1000</b>	FDD0M6EDA0	1000	230	50	626	505	98	17,7	White
<b>1500</b>	FDD0M6EDF0	1500	230	50	790	505	98	24,4	White
<b>2000</b>	FDD0M6EDK0	2000	230	50	930	505	98	29,2	White
<b>N 1000</b>	FDE0M6EDA0	1000	230	50	626	505	98	17,7	Anthracite
<b>N 1500</b>	FDE0M6EDF0	1500	230	50	790	505	98	24,4	Anthracite
<b>N 2000</b>	FDE0M6EDK0	2000	230	50	930	505	98	29,2	Anthracite




# Sinuoso

DRY INERTIA ELECTRIC RADIATOR  
(NATURAL STONE)

- ▶ **Aluminium body**
- ▶ **Colours:** White RAL 9010 and Anthracite grey
- ▶ **Curved design.**
- ▶ **Interface with digital display**
- ▶ **NTC temperature probe and electronic temperature regulation**
- ▶ **In order to optimise consumption, the radiator provides:**
  - Daily and weekly programming (9 pre-set programs and 4 customizable programs)
  - Open window detection function
  - Presence detection function
  - Consumption display
- ▶ **Safety:**
  - Keypad lock



Model	Code for Pilot Wire	Power	Voltage	Frequency	Length	Height	Depth	Net weight	Colour
		W	V	Hz	mm	mm	mm	kg	
<b>1000</b>	FSD0M3FDA6	1000	230	50	565	600	102	20,5	White
<b>1500</b>	FSD0M3FDF9	1500	230	50	802	600	102	30,1	White
<b>2000</b>	FSD0M3FDKB	2000	230	50	961	600	102	36,5	White
<b>N 1000</b>	FSE0M3FDA6	1000	230	50	565	600	102	20,5	Anthracite
<b>N 1500</b>	FSE0M3FDF9	1500	230	50	802	600	102	30,1	Anthracite
<b>N 2000</b>	FSE0M3FDKB	2000	230	50	961	600	102	36,5	Anthracite

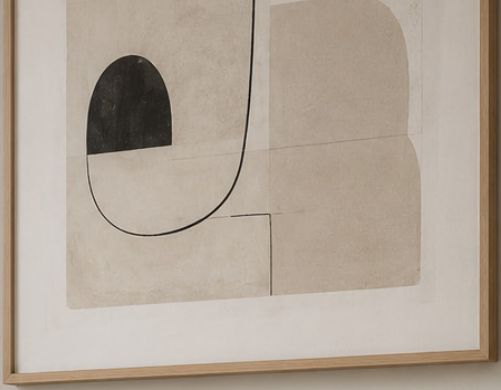

The manufacturer reserves the right to carry out the necessary changes without prior notice.

Pub. Relations Off. Fondital - CTC 03 F 080 - 01 Marzo 2026 (05/2026)

FONDITAL S.p.A. Società a unico socio

Via Cerreto, 40

25079 VOBARNO (Brescia) Italia

Tel.: +39 0365 878.31 - Fax: +39 0365 878 304

Web: [www.fondital.com](http://www.fondital.com)



COMPANY WITH  
MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
ISO 9001 • ISO 14001  
ISO 45001 • ISO 50001